

Design of Compact Microstrip Antenna Array for Wireless Applications by Using HFSS

¹Dr.M.LakshmuNaidu, ²P.Jhansi, ³T. Lokesh, ⁴B. MohanAnilKumar, ⁵P.Jagan MohanRao

¹*Sr.Asst.Professor, Dept. of ECE, Aditya Institute of Technology and Management (A)-Tekkali, AP*

^{2,3,4,5}*Students, Dept. of ECE, Aditya Institute of Technology and Management (A)-Tekkali, AP*

Abstract—The modern wireless communication desires high gain, wide bandwidth and minimal size antennas that are efficient to provide improved performance over a wide range of frequency spectrum. This requirement leads to the design of microstrip patch antenna. This paper presents the design of compact 2x2 microstrip patch antenna array which uses the corporate feed technique for excitation. The proposed antenna is designed on FR-4 substrate with dielectric constant 4.4 and thickness 1.6mm. Dielectric constant and parameters like Return Loss, Gain and Radiation pattern are calculated using high frequency simulation software. The fabricated antennas results are to be compared with Simulation results. The antenna has been designed for the range 8 GHz. Hence this antenna highly suitable for C and X band applications

Keywords: Microstrip antenna, corporate feed, FR-4 substrate, Microstrip antenna array

I. INTRODUCTION

As an interface between the transmitter/receiver and the propagation media, antenna is an essential part of any wireless communication (satellites, radars, aviation, medical applications etc.). The ever-increasing need for lightweight computing devices and the emergence of many systems, it is important to design a compact and more efficient antenna for communication [2, 10]. And there is a need for more compact antennas due to decrease in size of personal communication devices. As communication devices become smaller due to greater integration of electronics, the antenna becomes a significantly larger part of the overall package volume. For this purpose, Compact microstrip antenna is one of the most suitable for wireless application [2,3]. The word “Microstrip” comes because the thickness of this metallic strip is in micrometer range. Microstrip patch antennas are well known, for the reason that they have some advantages due to their conformal and simple planar structure. They allow all the benefits of

printed-circuit technology [3]. A huge number of papers are available on the investigation of various aspects of microstrip antennas. The essential features of a microstrip antenna are relative ease of construction, light weight, low cost and either compatibility to the mounting surface [4, 8] or, at least, an extremely thin projection from the surface. The major drawback of microstrip patch antenna is the narrow bandwidth. In single element antenna, the radiation pattern is equally very broad and the directivity is relatively low. This problem can be resolved by increasing the size of the element thus increasing the directivity. Other way to enlarge the antenna without changing the size of the particular elements is to assemble the radiating elements in a geometrical configuration known as an “array”. A Microstrip antenna array is very flexible antenna. It could be used to arrange required radiation pattern and scanning the beam of the antenna array. The performance of a microstrip patch antenna and array antenna strongly depends on several factors such as type of substrate, feeding technique, the thickness of dielectric and dielectric constant of substrate respectively. But it has few obstacles like narrow bandwidth, Less gain and broad beam width. To increase the bandwidth, directivity and gain, the most common method is using multielements which are known as array. [7, 9] The efficiency of microstrip antenna arrays may be enhanced significantly by reducing losses in the feed network. Selection of dielectric substrate materials and their thickness are the primary parameters in terms of size and compactness a rectangular microstrip patch antenna. Compactness comes with a trade-off in bandwidth, directivity and gain. An array of patch antennas is used. This array improves the gain, band width and radiation pattern of the patch antenna [1, 9]. In this paper the designed microstrip antennas are also

suitable for C and X band applications. The prolonged AM broadcast band or simply “X band” is a segment of the microwave radio region of the electromagnetic spectrum. X-band radar frequency sub-bands are used in the civil, military and government institutions for weather monitoring, air traffic control, maritime vessel traffic control, defense tracking, and vehicle speed detection for law enforcement. In radar engineering, its frequency variety is specified by the IEEE at 8.0 to 12.0 GHz. X band is used in radar applications including continuous-wave, pulsed, single polarization, dual-polarization, synthetic aperture radar, and phased arrays. In Ireland, Libya, Canada, the X is used for terrestrial broadband [1, 5, 6]. The proposed antenna is designed by the substrate material FR-4 and its dielectric constant 4.4 and height 1.6mm.

II. CORPORATE FEEDING NETWORK

Microstrip antennas are used in arrays and also used as single elements. By using array in communication systems we improve the performance of the antenna like increasing gain, directivity scanning the beam of an antenna system, and other functions which are difficult to do with the single element. The microstrip antenna array can be classified with different principle. The element of array can be divided in to form, linear, planar. The feed network of phased array can be categorized into parallel and series feed. The parallel *h* (Corporate) feed has single input port and multiple feed lines [1, 6, 9]. In the corporate feed configuration, the antenna elements are fed by 1: n power divider network with identical path lengths from the feed point to each element. The corporate-feed network is used to maintain power splits of 2n (i.e., n = 2; 4; 8; 16; etc.). Corporate-feed arrays are in general and adoptable. This method has more control of the feed of each element and is absolute for scanning phased arrays, multiband arrays. Thus, it provides better directivity as well as radiation efficiency and minimize the beam fluctuations over a band of frequencies compared to the series feed array. The phase of each element can be controlled by using phase shifters while amplitude can be adjusted using either amplifiers or attenuators [1, 12].

III.DESIGN OF PLANNER ARRAY

Design Specification: The three essential parameters for the design of a rectangular Microstrip Patch

Antenna are: • Frequency of Operation The resonant frequency of the antenna must be selected appropriately. The resonant frequency selected for design is 8GHz. • Dielectric constant of the substrate (ϵ_r) The dielectric material selected for design is FR-4 which has a dielectric constant of 4.4. • Height of dielectric substrate (h) Because of using FR-4, so height of dielectric substrate is 1.6 mm. fr is8 GHz

Table.1.Microstripantenna parametersandvalues

SNO	Parameter	Values
1	Width	11mm
2	Effective dielectric constant	5.55mm
3	Effectivelength	7mm
4	Lengthextension	1.028
5	Actuallength	8.9mm
6	Frequency	8GHz
7	Height	1.6mm

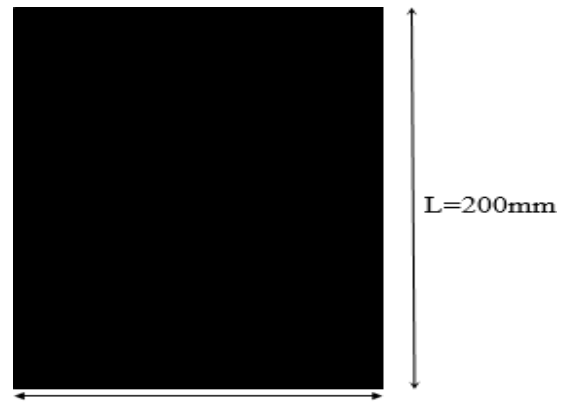


Figure.2.Proposedplannerantenna arrayground

The shape of the radiating element is rectangular planar arraywith the application of fractals to the rectangles. The groundplane has been fixed to a length of 200mm and a width of100mm.The radiating element is fed by 50Ωmicrostrip transmission line has a Centre width $W_6=3mm$ Substrate with dielectric constant of 4.4. The HFSS design model of the antenna is described below:

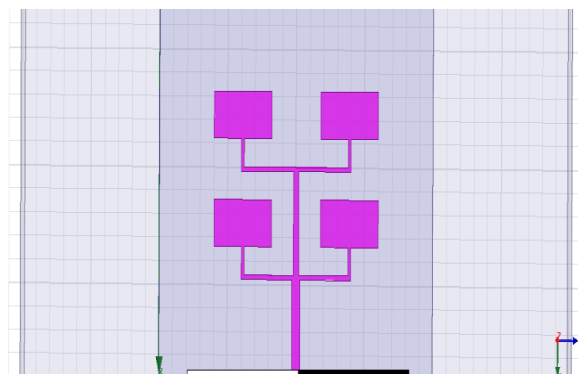


Figure.4.FourelementPlannerarrayHFSSmodel

The Antenna is designed using complete ground plane rather than going for the partial ground plane. The ground plane has been fixed to a length of 200mm and a width of 100mm. The

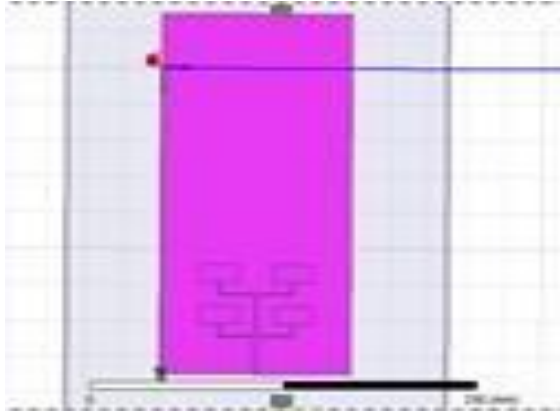


Figure.5. Ground planner array

Partial Ground in the hfss model has been shown in the figure.

Return Loss:

The return loss obtained for the planar array antenna is shown in the figure below

Table.2. Return loss of planar array antenna's no

sno	Frequency in GHz	Return loss in dB
1	6.725	23.43
2	8.100	-14.61
3	8.8750	-10.27
4	9.55	-11.412

Frequency in GHz Return loss in dB
 1 6.725 23.43
 2 8.100 -14.61
 3 8.8750 -10.27
 4 9.55 -11.412
 Antenna Gain The gain of antenna plays a major role, it defines the area of coverage and the directional characteristics of the designed antenna. The 3D polar plot of the antenna

The planar 4 element array antenna has been tested by vector, desired return loss is -10dB the antenna got a better return loss which is very useful and can be used in that particular frequency when it satisfies other constraints. The antenna showed a return loss of -11.053dB at 6.880GHz, -23.137dB at 7.912GHz -17.73.dB at 8.652GHz and -11.626dB at 9.55GHz.

IV. CONCLUSION

The unique feature of this microstrip antenna is its ease to get higher performance. The proposed designed antenna is simple, minimal size and high efficient for the applications in 8 GHz frequency

ranges. The acceptable parametric outcomes such as the Return Loss, Gain and Efficiency for the corporate feed patch antenna are obtained. From the comparative study of different analysis of corporate feeding technique, it is concluded that microstrip antenna simulated using HFSS Suite provides a bandwidth enhancement of around 20db. And also it has achieved the best return losses at the desired frequency region, which is at 8 GHz. In future, the work will be carried out for antennas with different feeding techniques and the planar microstrip antenna array is best suitable for C and X bands. V.

REFERENCES

- [1] Dr. B.Rama Rao, B.Sivanad Reddy M.BalaKrishna: "Design of Compact MicroStrip Antennas Array for Wireless Applications"-IJESC International Journal Of Engineering Science and Computing
- [2] P. Subba Lakshmi, R.Rajkumar: "Design and Characterization of corporate feed rectangular microstrip patch Array antenna-IIEEE international conference on emerging trends in Computing communication(2013).
- [3] Pradeep Kumar, Neha Thakur: "Micro strip Antenna for 2.4 GHz wireless applications". International journal of engineering Trends and Technology volume 4 issue 8(2013).
- [4] Ramansyah.A, Benny Motiora: Designing and manufacturing microstrip antenna for wireless communication at 2.45GHz, International journal of computer and Electrical Engineering volume 3, No.5(2011)
- [5] Deepti Saxena¹, Sweta Agarwal. "Low Cost E-Shaped Microstrip Patch Antenna Array for WLAN" International Journal of Advanced Research in Electrical, Electronics and Instrumentation Engineering. Vol. 3, Issue 4, April 2014
- [6] A.Dalli, L. Zenkouar, S. Bri "Conception of Circular Sector Microstrip Antenna and Array" International Journal of Microwaves Applications. Volume 1, No.1, 2012.