

Geothermal Power Plant Design Using PLC & SCADA

Swapnil Arun Namekar¹, Akash Sudhakar Bhavsar²

¹Assistant Professor, Department of Electrical Engineering, Bharati Vidhyapeeth Deemed To Be University, College of Engineering, Pune, India

²Student, Department of Electrical Engineering, Bharati Vidhyapeeth Deemed To Be University, College of Engineering, Pune, India

Abstract- This power generation we are proposing a new Reasonable method to connect this energy with PLC. direct sources occupation by conveyance water down a well to be excited by the Earth's warmth .Then a heat impel is used to take the heat from the Antiestablishment water to the essence that heats the residence. Then subsequent to the water it is cooled is injected back interested in the Earth with PLC &SCADA. at any position on the planet, there is general warmth of 40°C / km dug into the earth. Consequently, if one digs 22,000 to 23000 feet the temperature will be in relation to 150°C to 200°C above the surface temperature. This differentiation will be requiring constructing electricity. Nevertheless, no useful and inexpensive technology has been developed to extract this outsized source of liveliness. In this method is used to geothermal power plant design for a future improvement and befinits.

I.INTRODUCTION

Geothermal energy is thermal energy generated and collected in the Earth. Thermal power is the energy that measure the temperature of substance. The thermal power of the soil outside instigates from the ground-breaking arrangement of the sphere (20%) and from radioactive goes moldy of resources (80%). The geothermal gradient, which is the dissimilarity in temperature between the core of the planet and its surface, drives an unremitting conduction of thermal vigor in the form of heat from the core to the surface early mine. Excavations showed that the Earth's temperature was escalating with depth, under an incline of 3-4°C/100m. The entirety heat flux from the Earth's interior amounts to 90 mWth/m². It provides us with a plentiful, no polluting, almost inestimable source of clean along with renewable power. The heat originates from the Earth core high temperature 5,000°C at 7,000 km depth and the radioactive perish of rocks, long life isotopes of

Uranium, Thorium and Potassium. The entirety heat satisfied of the Earth stands in the order of 12.6 x 10²⁴ MJ, and that of the outside of 5.4 x 10²¹ MJ, undeniably a huge figure when compared to the total world energy demand which amounts to ca 61013 MJ/yr i.e. a 200million times lesser.

Nevertheless, only a fraction of it can be utilized by human. Our utilization of this energy has been perform to areas in which geological conditions allow a solution to "transfer" the heat starting deep hot zones to, or nears, the exterior, thus giving rise to geothermal property. The heat outervolve from the Earth's core, melting the rocks and forming the magma. Subsequently, the magma rises toward the Earth's outside carrying the heat from below all the way during convective motions.

In a quantity of areas it remains beneath the crust, heating the neighboring rocks and hosted waters. Some of this hot geothermal water migrates uphill, even though faults and cracks, accomplishment the surface as hot springs, but almost of it remains underground, trapped in cracks and porous rocks, forming the geothermal reservoirs. In such locations the geothermal warm flow can reach values ten times superior than normal. Almost industrial processes needs some form of organize system if they are to run safely and reasonably. Very few industrial plants can be left to run themselves, and most need a quantity of form of control classification to ensure safety and less costly operation.

In any outline, automation involves Changing some or all-human participation and Endeavor required both transportation out and Scheming particular progression. To accomplish progression automation, the machinist must be replaced by a control system that has the capability to establish, control and stop a process in comeback to measured variables within the process, in order to obtain the preferred productivity.

These objectives are obtained using a control system based on PLC microcontroller and using SCADA man and machine boundary. This paper is supplementary divided into the subsequent parts. Part 2ed. Explains the design of our proposed system. 3rd explains the features and encouraging attributes of the system. In part 4th. We conclude this disscosion.

II. GEOTHERMAL POWER PLANT DESIGN

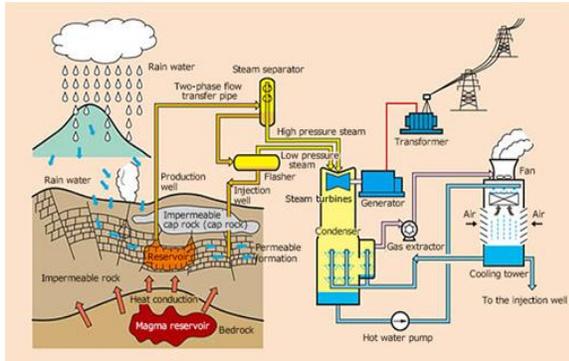


Fig.1. Block Diagram Of Geothermal Power Plant

i. Tank Low/High Level Sensor:-

This sensor (LM 324) is used to determine the low/high water level of the tank and provided that the output to the PLC for dispensation. When the switches are congested, the resistance is summed and transformed to in progress signals that are comparative to the level of the liquid. These sensors work good for liquid level dimensions handing out, waste treatment, and additional various applications.

ii. Turbine Speed Measuring Sensor :-

A turbine speed sensor, also termed a Different speed sensor, is worn for measuring the performance of the turbine by evaluating separating performance and other machinery of the turbine. It also find the revolution speed of the turbine, which shows the input insurrection of the transaxle. The electronic communication control finding the shift timing of the apparatus and controls the engine torque and hydraulic heaviness based on an assortment of situation. Gas turbine temperature sensors determine the temperature at different points in a turbine, from the wear out temperature to the deportment high temperature. But in this development we are using IR sensor to calculate the velocity of the motor. This

extraordinary infrared sensor is not function as mechanical or added sensor but it uses to detect the Shifting of black and white colors. Those black and white colors are showing on a motor shaft or motor elevator. That pulley is associated to the motor shaft and the infrared sensor will positioned near the pulley. The revolutions of the motor will origin the changes of black and white colors. These changing of both colors manufacture the different signal or voltage and that voltage is compared using a comparator and other electronic device to occupation with digital harvest. Then, that output pointer will display at seven subdivision display to show the velocity of motor in rotation per minute.

iii. Temperature Sensor :-

Here the temperature sensor which is used is LM 35. Which has operating degree from -70°C to 170°C . This sensor is highly sensitive to those of operating thermostat because of the coating of the pins which help for further oxidation. It is of low cost highly effective and efficiency in usage.

iv. Turbine Motor :-

Impulse turbines change the course of flow of a elevated velocity solution or gas jet. The Consequential impulse spins the turbine and leaves the fluid stream with diminished kinetic force. There is no heaviness transform of the solution or gas in the turbine blades, as in the case of a condensation or gas turbine; the complete pressure drop takes place in the immobile blades. Before accomplishment the turbine, the fluid's force head is changed to rapidity head by accelerating the fluid with a nozzle.

Here the turbine motor worn in our project is a DC 12V gear motor. A DC motor is a mechanically commutated thrilling motor power-driven from direct current (DC). The stator is at a standstill in space by description and therefore so is its present. The existing in the rotor is switched by the commutate to also be stationary in break. This is how the comparative angle between the stator and rotor captivating flux is maintained near 90 degrees, which generates the greatest torque. The beginning of DC motors to run apparatus eliminated the need for confined steam or interior combustion engines, and line shaft constrain systems.

DC motors can activate directly from rechargeable batteries, provided that the motive authority for the

original electric vehicles. Today DC motors are immobile found in applications as small as toys and disk drives, or in large sizes to activate steel rolling mills and paper apparatus.

III. PLC & SCADA SYSTEM

Programmable manager is a digital system used for mechanization of typically manufacturing electromechanical procedure, such as be in authority of equipment on factory people attending worship lines, enjoyment rides. PLCs are used in numerous industries and apparatus. PLCs are considered for multiple analogue and digital inputs and output preparations, extended temperature ranges, invulnerability to electrical noise, and struggle to vibration and collision. Programs to organize machine procedure are characteristically stored in non-volatile recollection.

The programmable organizer offers solid-state consistency, lower power expenditure and simplicity of expandability. Overall Programmable Logic Controller is a mini computer particularly designed for industrial and other applications.

SCADA SYSTEM

SCADA system are used to manage and Systematize a plant or machinery in manufacturing such as telecommunications, water and waste put in order power, lubricate and chat cleansing and transport. a SCADA system gathers in sequence, such as somewhere a escape on a pipeline has occurred, transfers the information reverse to a central site, alerting the home station that the leak has occurred, haulage out compulsory analysis and be in charge of, such as influential if the leak is dangerous, and displaying the information in a commonsense and prearranged fashion. SCADA systems can be moderately simple, such as one that monitors ecological conditions of a diminutive office building, or incredibly compound, such as a system that monitors all the movement in a nuclear power plant or the activity of a municipal water organization

IV. FEATURES & POSITIVE ATTRIBUTES

1. Major Cost Saving:-

Thermal energy normally involves low successively costs as it saves 80% costs over relic petroleum and no petroleum is worn to produce the power.

2. Reduce Reliance on Fossil Fuels :-

Confidence on fossilfuels decreases with the augment in the use of geothermal force. With the skyrocket prices of oil, a lot of countries are approaching companies to support these clean sources of power.

3. No Pollution:-

This is individual of the main advantages of using geothermal vigor since it does not generate any pollution and facilitate in creating unsoiled atmosphere. Being the renewable resource of energy, geothermal liveliness has helped in tumbling global warming and contamination.

4. Direct Use:

Because ancient period, people having been using this source of force for taking bath, heating homes, preparing food and today this is also worn for direct heating of homes and offices. This makes geothermal force cheaper and reasonable.

5. Job Creation and Economic Benefits:

Government of a range of countries is investing enormously in manufacture of geothermal energy which on other tender has created more jobs for the restricted people.

6. Additional capacity:

The geothermal power undergrowth are very bendable and adding supplementary capacity for producing more influence due to higher anxiety is quite realistic and inexpensive.

ADVANTAGES OF GEOTHERMAL ENERGY

- It is a renewable foundation of power. By distant, it is non-polluting and atmosphere responsive.
- There is no expenditure or production of byproducts.
- Geothermal energy can be worn unswervingly. In ancient times, people used this starting place of energy for heating homes, cooking, etc.
- Preservation cost of geothermal influence plants is incredibly less.

DISADVANTAGES OF GEOTHERMAL ENERGY

- Only the minority sites have the probable of Geothermal Energy.
- Most of the sites, where geothermal energy is fashioned, are far from markets, where it needs to be obsessive.
- Whole generation probable of this source is too diminutive.
- There is for eternity a danger of outbreak of volcano.
- Equipment cost of condensation power plant is very towering.
- There is no assurance that the amount of force which is produced will justify the capital expenses and operations costs.
- It may discharge some harmful, poisonous gases that can escape through the holes drilled through structure.

V. CONCLUSION

The principle of this power plant was to study the implementation of PLC in geothermal power Plant beside with its use in automated Influence plant industries. The objective also Consisted of evaluate how it could be enhanced in Terms of its usability.

The design development of the model was examined in collection scenery. Geothermal power plants are the largest part often positioned in remote areas and it is, consequently, difficult to assign public to 24-hour shifts. The remote manage systems make possible people to solve this difficulty, making it probable to control from an isolated site. at the moment the automation of control apparatus increases the elasticity of operation.

The computerization technology furthermore provides more than one autonomous contro system level in solitary or multiunit power plants. In this method is explain about the PLC and SCADA system it's an easiest process to improve the Geothermal power plant system in future it's an most appropriate method for electrical and chemical engineering scheme.

VI. ACKNOWLEDGMENT

We would like to express our special thanks of gratefulness to Dr D S Bankar, head of the department of electrical engineering for their able guidance and support for completing our research

paper I would also like to thanks the faculty member of the department of electrical engineering who helped us with extended support.

REFERENCES

- [1] Dr.S.Senthil Kumar, Geothermal Power Plant Design using PLC and SCADA, International Journal of Advanced Research in Electrical, Electronics and Instrumentation Engineering, Vol. 1, Issue 1, July 2012.
- [2] Magnusson, T.J., and Gunnarsson, Á., 1989: Design of an automatic control system for the geothermal power plant.
- [3] Vinay Kakkar, Nirmal. Kr. Agarwal and Narendra Kumar, geothermal energy: new prospects, International Journal of Advances in Engineering & Technology, 2012.
- [4] L. Rybach, "Geothermal energy: sustainability and the environment," Geothermic, vol. 32, pp. 463-470, 2003
- [5] "Development of 3.75 MW Durgaduani Mini Tidal Power Project, Sunder bans, West Bengal". NHPC Limited – A Government of India Enterprise. December 2011,
- [6] Anantha, A. and Chowhan P.L., Strategies for a nation-wide survey of renewable energy resources available in each village in India, Rural Energy Management", Deep & Deep Publication, New Delhi., p.p.-2181-2186.