

Experimental Investigation on Strengthening of Fly Ash Bricks by Jute Fibre and Banana Fibre

Subitha T

Assistant Professor, SNS College of Engineering

Abstract - Increasing concern about the Global warming, primarily due to deforestation has led to the ban on use of clay brick by government in buildings construction. Subsequently, a large action plan for the development use of fly ash bricks substitute has resulted in creation of more awareness about the use of fly ash-based building materials. In the past one decade or so the joint efforts by R & D organizations, private industries and funding agencies provided the much needed thrust for the actual transfer of technical know-how and product to the end users. Most of the developing countries are very rich in agricultural and natural fibre. Except a few exceptions, a large part of agricultural waste is being used as a fuel

Index Terms - Natural fibre, Jute fibre, Banana fibre, Fly Ash bricks, Compressive strength, Water absorption

I. INTRODUCTION

FLY ASH is a finely divided residue resulting from the combustion of ground or powdered bituminous coal or sub bituminous coal (lignite) and transported by the flue gases of boilers fired by pulverized coal or lignite. Fly ash is a waste byproduct material that must be disposed of or recycled. It consists mainly of spherical glass particle ranging from 1 to 150 µm in diameter, of which the bulk passes through a 45- µm sieve.

II. CHEMICAL COMPOSITION

Fly ash produced from the burning of younger lignite or sub-bituminous coal, in addition to having pozzolonic properties, also has some self-cementing properties. In the presence of water, Class C fly ash will harden and gain strength over time. Class C fly ash generally contains more than 20% lime (CaO). Unlike Class F, self-cementing Class C fly ash does not require an activator. Alkali and Sulphate (SO₄) contents are generally higher in Class C fly ashes.

Class C has $SiO_2 + Al_2O_3 + Fe_2O_3 = 50\%$

CLASS F FLY ASH:

The burning of harder, older anthracite and bituminous coal typically produces Class F fly ash. This fly ash is pozzolonic in nature, and contains less than 10% lime (CaO). Possessing pozzolonic properties, the glassy silica and alumina of Class F fly ash requires a cementing agent, such as Portland cement, quicklime, or hydrated lime, with the presence of water in order to react and produce cementitious compounds. Alternatively, in addition of a chemical activator such as sodium silicate water to a Class F ash can lead to the formation of a geo-polymer.

Class F has $SiO_2 + Al_2O_3 + Fe_2O_3 = 70\%$

III. EXPERIMENTAL MATERIALS

c) Fly Ash (Class F)

An Experimental work was carried out with Class F type of Fly Ash. The chemical compositions of Fly Ash are given in following Table 1.

Table 1: CHEMICAL COMPOSITIONS OF FLY ASH

S.NO	CHEMICAL COMPOSITIONS	% VALUE
1	Silicon dioxide (SiO ₂)	62.22
2	Magnesium oxide (MgO)	6.09
3	Total Sulphur trioxide (SO ₃)	3.00
4	Calcium Oxide (CaO)	5.30
5	Aluminium Oxide (Al ₂ O ₃)	7.63

b) Jute Fibre

The fibres are extracted from the ribbon of the stem. When harvested the plants are cut near the grouted with a sickle shaped knife. The small fibres, 5 mm, are obtained by successively rating in water, see Fig-2 beating, stripping the fibre, from the core and drying. Due to its short fibre length, jute is the weakest stem fibre, although it withstands rotting very easily. It is used as packaging material (bags), carpet backing, ropes, yarns and wall decoration.

c) Banana fiber

These fibres are extracted from the banana stem. The availabilities of this fibre from banana stem are 5 to 10%. The use of banana stem is very useful to produce paper, yarn, fabrics etc.



Fig 3: BANANA FIBRE

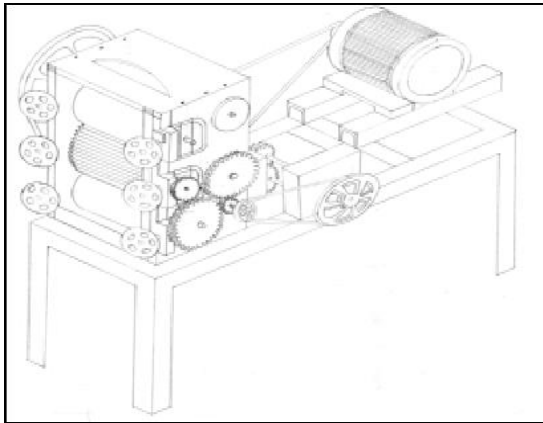


Fig: 4 EXTRACTING MACHINES

FRACTURE (strain rate of 0.1 min 1)

Fig 5: side view

IV. SOURCE OF MATERIAL

Table 3

S.NO	INGREDIENTS	SOURCES
1	Fly Ash	Nova, Ahmadabad, Gujarat
2	Sand	Bodeli, Gujarat
3	Quarry Dust	Sevaliya, Gujarat
4	Sludge Lime	Kota, Rajasthan
5	Jute Fibre	Sugam Hardware, Anand, Gujarat
6	Banana Fibre	Navsari Agriculture University, Navsari, Gujarat

V.EXPERIENTIAL METHODOLOGY

Various raw materials of brick mix in desired proportion are blended intimately in dry or wet form.

In this Standard Mix proportion Natural fibre are added 0.5%, 1%, 1.5%, 2% and 2.5% by weight of brick.



Fig 6: SET UP OF AUTOMATIC FLY ASH BRICK PLANT



Fig 7: FINAL FINISH

VI.PRODUCTS

- The wet brick-mix is fed into the machine mould. The vibration is given for a while and the mould is again fed. The striper head is pressed, and vibration is given simultaneously for about 8 seconds. The mould is lifted and bricks produced pallet is removed and kept on the platform for air drying.
- Next day the bricks produced on the previous day are put in the stack. The stack is formed with care to see that curing water and air for drying reach to every brick.
- After 3 days the hot water from the solar collector in small quantity is poured on the fresh stack without any pressure.
- After 5 days the solar collector water I poured on the bricks stack for 2 times a day.
- The bricks in stack after each watering are immediately covered with black PVC tarpaulin,

with a clear space of 250 mm form the layers of the bricks, inside the closer cover.

- The curing is continued for 15 days and the tarpaulin cover is removed.
 - The bricks are then left in the stack for drying or heating the bricks stack. The bricks are ready for dispatch after 22 days from the date of manufacture.
 - The comprehensive strength of the bricks produced from the brick-mix and the manufacturing process suggested here in will be 80 kg/cm² to 100 kg/cm².

It is observed that the bricks produced are found to be superior then that of conventional Red burnt clay bricks.

Table-4 REASULTS OF COMPRESSIVE STRENGTH TEST

Type of brick	Average Compressive Strength (N/mm ²)		
	7 Days	14 Days	21 Days
Fly Ash	6.123	6.685	7.896
Clay	5.078	5.339	5.557
JF1	6.614	6.813	8.061
JF2	5.903	6.068	7.026
JF3	5.180	5.210	6.052
JF4	5.086	5.112	5.965
JF5	4.801	4.983	5.513
BF1	6.630	6.812	8.051
BF2	6.343	6.423	7.809
BF3	5.310	5.738	6.825
BF4	5.212	5.524	6.742
BF5	6.117	5.512	6.124

Table-5 RESULTS OF WATER ABSORPTION TEST

Type of brick	Average Water Absorption (%)		
	7 Days	14 Days	21 Days
Fly Ash	13.231	12.125	10.192
Clay	18.234	17.264	14.231
JF1	14.356	12.254	10.236
JF2	14.625	13.365	10.986
JF3	14.982	13.437	12.563
JF4	15.361	13.261	12.981
JF5	16.129	15.127	13.231
BF1	14.025	12.421	10.287

VII. CONCLUSION

After all the effort and present experimental work, the following observation are made by replacement jute

fibre and banana fibre in fly ash bricks with different percentage and conclude that

1. Class F Fly ash is utilized in the brick manufacturing work as judicious decision taken by Engineers.
2. As the percentage of the jute fibre in brick increases, the compressive strength of the brick increases. In this experimental work 0.5% fibre addition in the brick gives the maximum strength 8.061 N/mm² after 21 days. Also, Banana fibre 0.5% addition in the brick gives the maximum strength 8.051 N/mm² after 21 days.
3. As the compressive strength of the brick increases, the water absorption of the brick decreases. In this experimental work maximum compressive strength after 21 days is 8.061 N/mm², where minimum water absorption is 10.236% after 21 days in Jute Fibre Fly Ash Brick.
4. As the compressive strength of the brick increases, the water absorption of the brick decreases. In this experimental work maximum compressive strength after 21 days is 8.051 N/mm², where minimum water absorption is 10.287% after 21 days in Banana Fibre Fly Ash Brick.
5. Use of fly ash and Natural fibre help in prevention of environmental degradation and use of agriculture land utilized in clay brick production.

REFERENCE

- [1] Aashish Kumar Parashar, Rinku Parashar (2012), "Comparative Study on Compressive Strength of Bricks Made with Various Materials to Clay Bricks.", International Journal of Science and Research Publication, Volume 2, Issue 7, July.
- [2] Chee-Ming Chan – Effects of Natural Fibres Inclusion in Clay Bricks: Physco-Mechanical Properties, International Journal of Civil and Environmental Engineering, March 2011. J. Clerk Maxwell, A Treatise on Electricity and Magnetism, 3rd ed., vol 2. Oxford: Clarendon, 1892, pp.68-73.
- [3] Jayesh Pitroda, Rajiv Bhatt, Indrajit Patel, and Dr. F.S.Umrigar, - Techno- Economical Study of FAL-G bricks-A Case study, National conference on fly ash/ Futuristic Material in civil Engineering

- Construction For Sustainable Development, pp. 1-2, 2010.
- [4] Malaviya S K, Chatterjee B and Singh K K (1999), “Fly ash- an emerging alternative building material”, proceedings of National Seminar, February 26-27, 1999, pp. 59.
- [5] Mayurkumar Patoliya, Jayesh Pitroda (2012), “An Experimental Study of Utilization Aspect Of Natural/Artificial fibre in Fly ash Bricks in Central Region of Gujarat”, National conference on advance in Engineering and advance in engineering and technology March 2012, pp.13.1-13.4 Kalol, Gujarat.
- [6] Mr. Ankit Patel, Mr. Sanjay Salla, Prof. Jayeshkumar Pitroda (January 2013), “A Study on Utilization of Agro-Wastes as an Innovative Material in Indian Context.”, International Journal Of Scientific Research (IJSR), ISSN – 2277 – 8179, Volume: 2, Issue: 2, Page No.: 30-35
- [7] Mr. Sanjay Salla, Prof. Jayeshkumar Pitroda, (December 2012), “A Comparative Review on: Effect of Natural Fibres
- [8] Mamta B. Rajgor, Prof. Jayeshkumar Pitroda (2013), “A Miniature Groundwork for Setting Industrial Wastes” Journal of International Academic Research for Multidisciplinary, JIARM, Volume 1 Issue 3APRIL 2013 • ISSN No 2320 – 5083 / 88-99
- [9] Mamta B. Rajgor, Prof. Jayeshkumar Pitroda (2013), “Stone Sludge: Economical Solution for Manufacturing of Bricks” International Journal of Innovative Technology and Exploring Engineering (IJITEE), ISSN: 2278- 3075, Volume-2, Issue-5, April 2013 /16-20
- [10] Nataamadja Andreas (2010), “Development of low-cost Fly ash bricks”.
- [11] Noorsaidi Mahat (2010), “Comparison Study on Oil Palm Trunk and Oil Palm Fruit BunchFibre Reinforced Laterite Bricks”, Morden Applied Science vol.4 No. 7 July.
- [12] Vimal Kumar, Mukesh Mathur, Preeti Sharma Kharia “Fly Ash Management: Vision for New Millenium.”
- [13] <http://www.docstoc.com/docs/23116529/Development-of-low-cost-fly-ash-bricks>.
- [14] <http://flyashindia.com/properties.htm>
- [15] www.tifac.org.in