

# EXPERIMENTAL INVESTIGATION OF TITANIUM BASED CRANKSHAFT USING FINITE ELEMENT METHOD

A. Ranjith Raj, P. Reginald Elvis, R. Kumar, S. Karthikeyan, M. Ganesan

Assistant Professors, Mechanical Engineering, Saranathan College of Engg., Trichy, Tamil Nadu, INDIA

**Abstract-** Crankshaft is large volume production component with a complex geometry in the Internal Combustion (I.C) Engine. This converts the reciprocating displacement of the piston in to a rotary motion of the crank. An attempt is made in this paper to study the Static analysis on a crankshaft from a single cylinder 4-stroke I.C Engine. The modelling of the crankshaft is created using Pro-e Software. Finite element analysis (FEA) is performed to obtain the variation of stress at critical locations of the crank shaft using the ANSYS software and applying the boundary conditions. Then the results are drawn Von-misses stress induced in the crankshaft is 109 N/mm<sup>2</sup>. The Theoretical results are obtained von-misses stress is 131.2 N/mm<sup>2</sup>. The validation of model is compared with the Theoretical and FEA results of Von-misses stress is within the limits. Further it can be extended for the different materials and dynamic analysis, optimization of crank shaft.

**Index Terms-** Crankshaft, finite element analysis (FEA), ANSYS Software, Static Analysis

## I. INTRODUCTION

The crankshaft plays a vital role in all Internal Combustion Engines. It is a large component, which converts the reciprocating displacement of the piston in to rotary motion with a four link mechanism. It has complex shape of geometry. The crankshaft experiences a cyclic load, due to the cyclic load fatigue failure occur over a period. The fatigue analysis has to be considered in the design stage itself. The design and development of crankshaft is always been an important task for the production industry, in order to reduce the manufacturing cost of the product, minimum weight possible and proper fatigue strength and other functional requirements. These improvements result in lighter and smaller engines with better fuel efficiency and higher power output. This study was conducted on a four cylinder four stroke cycle engine. Three different crankshafts from similar engines were studied in this research. The finite element analysis was performed on each crankshaft. Crankshaft must be strong enough to take the downward force of the power stroke without excessive bending so the reliability and life of the internal combustion engine depend on the strength of the crankshaft largely. The crank pin is like a built in beam with a distributed load along its length that varies with crank positions. Each web is like a cantilever beam subjected to bending and twisting.

1. Bending moment which causes tensile and compressive stresses.
2. Twisting moment causes shear stress.

There are many sources of failure in the engine one of the most common crankshaft failure is fatigue at

the fillet areas due to the bending load causes by the combustion. At the moment of combustion the load from the piston is transmitted to the crankpin, causing a large bending moment on the entire geometry of the crankshaft. At the root of the fillet areas stress concentrations exist and these high stress range locations are the points where cyclic loads could cause fatigue crack initiation leading to fracture.

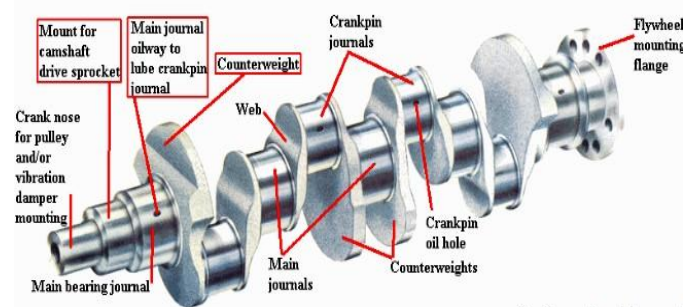


Figure 1.1: Multi cylinder crankshaft

Rinkle Garg and Sunil Baghl [1] have been analyzed crankshaft model and crank throw were created by Pro-E Software and then imported to ANSYS software. The result shows that the improvement in the strength of the crankshaft as the maximum limits of stress, total deformation, and the strain is reduced. The weight of the crankshaft is reduced. There by, reduces the inertia force. As the weight of the crankshaft is decreased this will decrease the cost of the crankshaft and increase the I.C engine performance. C.M. Balamurugan et al [2] has been studied the Computer aided Modeling and Optimization of crankshaft and compare the fatigue performance of two competing manufacturing technologies for automotive crankshafts, namely forged steel and ductile cast iron. The Three dimensional model of crankshaft were created by solid edge software and then imported to ANSYS software. The optimization process included geometry changes compatible with the current engine, fillet rolling and results in increased fatigue strength and reduced cost of the crankshaft, without changing connecting rod and engine block.

Gu Yingkui, Zhou Zhibo. [3] have been discussed a three-Dimensional model of a diesel engine crankshaft created by using PRO/E software and analytical ANSYS Software tool, it shows that the high stress region mainly concentrates in the knuckles of the crank arm & the main journal and the crank arm & connecting rod journal, which is the area most easily broken. Abhishekchoubey, and Jamin Brahmabhatt.[4] have been analyzed crankshaft model and 3-dimentional model of the crankshaft were created by SOLID WORKS Software and imported to ANSYS software. The crankshaft maximum deformation appears at the centre of crankpin neck surface. The maximum stress appears at the fillets between the

crankshaft journals and crank cheeks and near the central point journal. The edge of main journal is high stress area. R. J. Deshbhratar, and Y.R Suple.[5] have been analyzed 4-cylinder crankshaft and model of the crankshaft were created by Pro/E Software and then imported to ANSYS software. The maximum deformation appears at the centre of crankshaft surface. The maximum stress appears at the fillets between the crankshaft journal and crank cheeks, and near the central point. The edge of main journal is high stress area. The crankshaft deformation was mainly bending deformation under the lower frequency. And the maximum deformation was located at the link between main bearing journal and crankpin and crank cheeks.

An extensive literature review on crankshafts was performed by Zoroufi and Fatemi (2005) (6). Their study presents a literature survey focused on fatigue performance evaluation and comparisons of forged steel and ductile cast iron crankshafts. In their study, crankshaft specifications, operation conditions, and various failure sources are discussed. The common crankshaft material and manufacturing process technologies in use were compared with regards to their durability performance. In their literature review, geometry optimization of crankshafts, cost analysis and potential cost saving opportunities are also briefly discussed. Solanki et al. [7] presented literature review on crankshaft design and optimization. The materials, manufacturing process, failure analysis, design consideration etc. were reviewed. The design of the crankshaft considers the dynamic loading and the optimization can lead to a shaft diameter satisfying the requirements of the automobile specifications with cost and size effectiveness. They concluded that crack grows faster on the free surface while the central part of the crack front becomes straighter. Fatigue is the dominant mechanism of failure of the crankshaft.

Meng et al. [8] discussed the stress analysis and modal analysis of a 4-cylinder crankshaft. FEM software ANSYS was used to analyze the vibration modal and distortion and stress status of crank throw. The relationship between frequency and the vibration modal was explained by the modal analysis of crankshaft. This provides a valuable theoretical foundation for the optimization and improvement of engine design. Maximum deformation appears at the centre of the crankpin neck surface. The maximum stress appears at the fillet between the crankshaft journal and crank cheeks, and near the central point journal. The crankshaft deformation was mainly bending deformation under the lower frequency. Maximum deformation was located at the link between main bearing journal and crankpin and crank cheeks. So, the area prone to appear the bending fatigue crack.

Montazersadgh and Fatemi [9] choose forged steel and a cast iron crankshaft of a single cylinder four stroke engine. Both crankshafts were digitized using a CMM machine. Load analysis was performed and verification of results by ADAMS modeling of the engine. At the next step, geometry and manufacturing cost optimization was performed. Considering torsional load in the overall dynamic loading conditions has no effect on von Mises stress at the critically stressed location. Experimental stress and FEA results showed close agreement, within 7% difference. Critical locations on the crankshaft are all located on the fillet areas because of high stress gradients in these locations. Geometry optimization results in 18% weight reduction of the forged steel. Fillet rolling induces compressive residual stress in the fillet areas, which results in 165% increase in fatigue strength of the crankshaft.

## II. OBJECTIVES

- i) To model the crankshaft using PRO-E software
- ii) Static analysis by using ANSYS WORKBENCH software

## III. MODELING OF CRANKSHAFT

Configuration of the Engine to which the crankshaft belongs

Table 1: Dimensions for crankshaft

Length of crank pin	12.7
Diameter of crank pin	25.4
Shaft diameter	19.05
Bore diameter	68.3
Stroke length	51.8
Maximum pressure	3.15 N/mm <sup>2</sup>

### Force on the piston:

Bore diameter (D) = 68.30mm,

$$1) F_p = \text{Area of the bore} \times \text{Max. Combustion pressure} \\ = \pi/4 \times D^2 \times P_{\max}$$

$$F_p = 11.53 \text{KN}$$

2) Angle of inclination of the connecting rod with the line of stroke (i.e. angle  $\emptyset$ ).

$$\sin \emptyset = \sin \theta / (l/r)$$

Take  $l/r=5$ , The maximum value of tangential force lies when the crank is at an angle of  $\theta=35^\circ$  (from  $30^\circ$  to  $40^\circ$  for diesel engines)  
 $\emptyset=6.35^\circ$

3) Thrust Force in the connecting rod,

$$F_Q = F_p / \cos \emptyset \\ F_Q = 11.60 \text{KN}$$

4) Thrust on the crankshaft can be split into tangential component and radial component.

(i) Tangential force on the crankshaft,

$$F_T = F_Q \sin(\theta + \emptyset) \\ = 7.66 \text{KN}$$

(ii) Radial force on the crankshaft,

$$F_R = F_Q \cos(\theta + \emptyset) \\ = 8.70 \text{KN}$$

5) Reactions at bearings due to tangential force is given by

$$H_{T1} = H_{T2} = F_T / 2 \\ = 3.83 \text{KN}$$

6) Reactions at bearings due to radial force is given by

$$H_{R1} = H_{R2} = F_R / 2 \\ = 4.35 \text{KN}$$

7) Bending moment at the centre of the crankshaft

$$M_C = H_{R1} \times b_2 \\ \text{Where } b_2 = 9.65 \text{mm} \\ = 41.977 \text{KN-mm}$$

8) Twisting moment on the crankpin

$$T_C = H_{T1} \times r \\ \text{(Where } r \text{ is the radius of the crank pin, } r=12.7 \text{mm)} \\ T_C = 48.641 \text{KN-mm}$$

9) The von Misses stress induced in the crank-pin  $\sigma_v$  is,

$$M_{ev} = \sqrt{(K_b * M_c)^2 + 0.75(K_t * T_c)^2}$$

$$= 105.1 \text{ KN-mm}$$

Here,  $K_b$  = combined shock and fatigue factor for bending (Take  $K_b=2$ )

$K_t$  = combined shock and fatigue factor for torsion (Take  $K_t = 1.5$ )

$$M_{ev} = \pi/32 * d^3 * \sigma_v$$

$$\sigma_v = 131.20 \text{ N/mm}^2$$

First prepare Assembly in Pro-E 5.0 for crankshaft and Save as this part as .iges for Exporting into ANSYS 14.5. for meshing and static analysis.

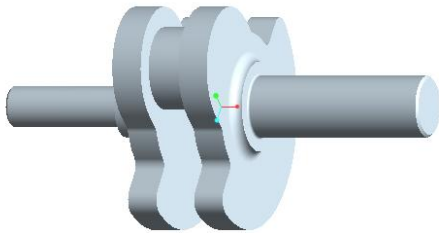


Figure :- 3.1. Model created in Pro-E

IV. MESHING OF CRANKSHAFT:

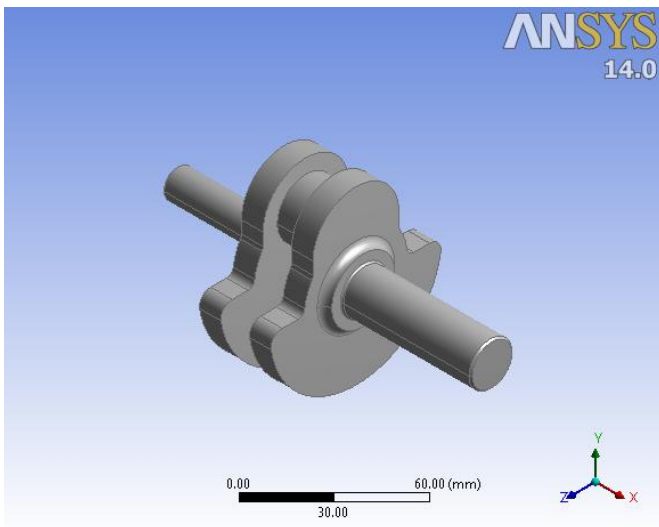


Figure:- 4.1. Model imported from Pro-E in ANSYS

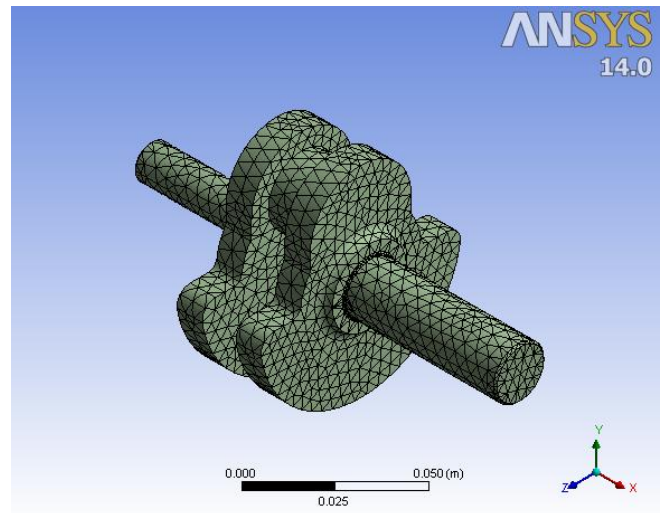


Figure:- 4.2. Meshed view of crankshaft

V. ANALYSIS

ANSYS is general-purpose Finite Element Analysis (FEA) software package. Finite Element Analysis is a numerical method of deconstructing a complex system into very small pieces (of user designed size) called elements. The software implements equations that govern the behaviour of these elements and solves them all; creating a comprehensive explanation of how the system acts as a whole. The ANSYS Workbench environment is an intuitive up-front finite element analysis tool that is used in conjunction with CAD systems and/or Design Model. ANSYS Workbench is a software environment for performing structural, thermal, and electromagnetic analyses. The Workbench focuses on attaching existing geometry, setting up the finite element model, solving, and reviewing results

5.1 Static Structural Analysis

A static structural analysis determines the displacements, stresses, strains, and forces in structures or components caused by loads that do not induce significant inertia and damping effects. Steady loading and response conditions are assumed that is, the loads and the structure's response are assumed to vary slowly with respect to time. The types of loading that can be applied in a static analysis include externally applied forces and pressures, Steady-state inertial forces (such as gravity or rotational velocity), Imposed (nonzero) displacements, Temperatures (for thermal strain).

5.2 Materials used for Crankshaft

*Ti-6Al-4V + 12%TiC*

5.3 Applying Material Properties for analysis

*Ti-6Al-4V + 12%TiC*

Young's modulus	: 1.14E14 Pa
Density	: 4430kg/m <sup>3</sup>
Poisson's ratio	: 0.342

5.4 Define boundary condition for analysis:

Boundary conditions play an important role in Finite Element Analysis. Here we have taken both remote displacements for bearing supports are fixed. Then apply force and moment on the crankpin

Inputs given for the analysis of crank shaft

Moment: 41.977 KN-mm

Force : 11.53 KN

### VI. ANALYSIS RESULTS

#### (ii) Ti-6Al-4V+12%TiC

Various analysis results for forged steel are as follows:

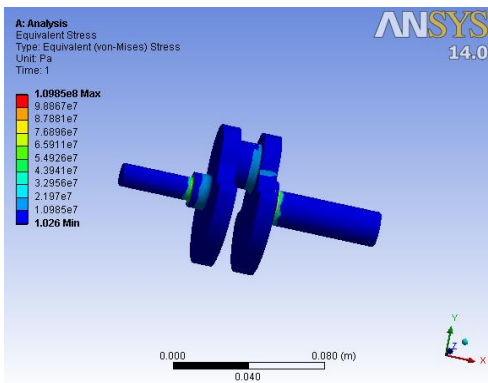


Figure: 6.1 Equivalent stress

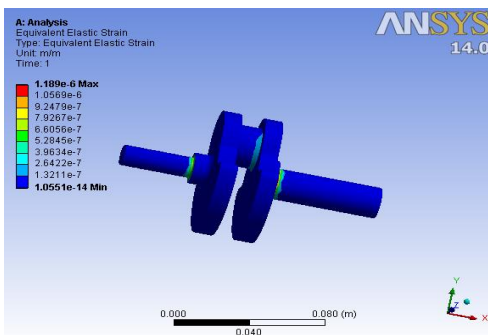


Figure: 6.2 Equivalent strain

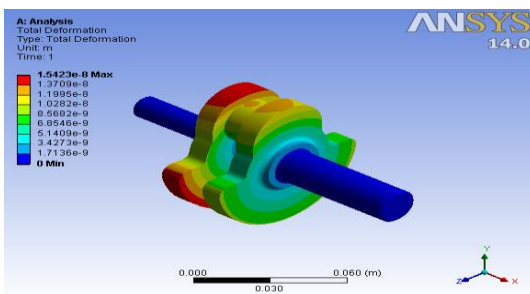


Figure: 6.3 Total deformation

### VII. VALIDATED RESULTS

Table 7.1 Comparison of results between Theoretical and ANSYS results of Forged steel

Type of Stress	Forged steel	
	Theoretical results	ANSYS results
Von-Misses stress (N/mm <sup>2</sup> )	131.2	109

### VIII. CONCLUSION

- The maximum deformation appears at the centre of the crankpin neck surface.
- The maximum stress appears at the fillet areas between the crankshaft journal and crank cheeks and near the central point journal.
- The value of von-misses stresses that comes out from the analysis is far less than material yield stress so our design is safe.

### REFERENCES

- [1] Rincle Garg, Sunil Baghla, “Finite element analysis and optimization of crankshaft”, International Journal of Engineering and Management Reaserch, vol-2, Issue-6, ISSN: 2250-0758, Pages: 26-31, December 2012.
- [2] C.M Balamurugan, R. Krishnaraj, Dr.M.Sakhivel, K.kanthavel, Deepan Marudachalam M.G, R.Palani, “Computer Aided modeling and optimization of Crankshaft”, International Journal of scientific and Engineering Research, Vol-2, issue-8, ISSN:2229-5518, August-2011.
- [3] Go Lingui, Zhou Zibo, “Strength Analysis of Diesel Engine Crankshaft Based on PRO/E and ANSYS”, Third International Conference on Measuring Technology and Mechatronics Automation, 2011.
- [4] Abhishek choubey, Jamin Brahmhatt, “Design and Analysis of Crankshaft for single cylinder 4-stroke engine”, International Journal of Advanced Engineering Research and studies, vol-1, issue-4, ISSN:2249-8974, pages: 88-90, July-sept 2012.
- [5] R.J Deshbhratar, Y.R Suple, “Analysis and optimization of Crankshaft using FEM”, International Journal of Modern Engineering Research, vol-2, issue-5, ISSN: 2249-6645, pages: 3086-3088, Sept-Oct 2012.
- [6] Farzin H. Montazersadgh and Ali Fatemi “Stress Analysis and Optimization of Crankshafts Subjected to Dynamic Loading”, AISI, August 2007.
- [7] A. Solanki, K. Tamboli, M.J, M.J, M.J, M.J. Zinjuwadia, (2011), “Crankshaft Design and Optimization- A Review” National Conference on Recent Trends in Engineering & Technology
- [8] J. Meng, Y. Liu, R. Liu, (2011), “Finite Element analysis of 4-Cylinder Diesel Crankshaft” I.J. Image, Graphics and Signal Processing, vol 5, pp. 22-29
- [9] Shenoy, P. S. and Fatemi, A., 2006, “Dynamic analysis of loads and stresses in connecting rods,”IMEchE, Journal of Mechanical Engineering Science, Vol. 220, No. 5, pp. 615-624