

# Industrial Automation using Microcontroller

Utkarsh Chaurasia<sup>1</sup>, Shripad G. Desai<sup>2</sup>

<sup>1</sup>Student, Department of Electrical Engineering, Bharati Vidyapeeth Deemed (To Be) University, College of Engineering, Pune, India

<sup>2</sup>Assistant Professor, Department of Electrical Engineering, Bharati Vidyapeeth Deemed (To Be) University, College of Engineering, Pune, India

**Abstract** - This paper mainly focuses on the controlling of home/industrial appliances remotely when the user is away from the place. Objective of this project is to avoid number of accidents, human errors, and for manual safety. 8051 Micro Controller is the core component of this project. So here we are proposing a micro controller based industrial automation system that detects Smoke, Temperature, Fire, Alcohol, LPG Gas etc., to keep track of accidents This paper includes the study of various electronic devices using sensors. . The home appliances control system with an affordable cost was thought to be built that should be mobile providing remote access to the appliances. The motivation was to facilitate the users to automate their homes having universal access.

**Index Terms** - Alcohol detection, Industrial Automation, LPG detection, Microcontroller Smoke detection, Temperature, and fire detection,

## 1. INTRODUCTION

Every person wants his industry to be secured. Security is primary concern everywhere and for everyone This is a simple and useful security system. Here our application uses Micro controller as its controller [3]. A Gas sensor is present to avoid leakage of liquid petroleum gas intimated with buzzer alert and simultaneously on the exhaust fan and switch off the lights automatically [6]. This is very dangerous to human being present in the industry as it can cause fire. Secondly a smoke as well as alcohol sensor is present to detect if any person is smoking inside the industry or any drunken persons entering in the industry as it gives probability of improper handling of equipment as well as it may cause risk of fire intimated with buzzer. A fire sensor is also present for protection against fire hazard and is intimated with

buzzer alert and also water sprinkler gets on [5]. A temperature sensor is also present at this end to find out increase in temperature and switch on cooling fans to cool the room. In this way security is provided through all aspects. A Microcontroller is a complete microprocessor system, consisting of microprocessor, limited amount of ROM or EPROM, RAM, and I/O ports, built on a single integrated circuit (IC) [6].

## 2. SYSTEM DESCRIPTION

Micro controller is the core component of this project. It is interfaced with Alcohol detector, Smoke detector, LPG sensor, Fire sensor and Temperature sensor. If any accident happens or any abnormal condition arises, the sensor of particular field activates and gives signal to microcontroller, and it starts executing according to the program which is fed in it. Different types of sensors such as MQ2, MQ3 and MQ6 are being used for protection against Smoke, Alcohol, LPG Gas etc., alcohol sensor (MQ3) and smoke sensor (MQ2) are used if any drunken persons entering in the industry or any person is smoking inside the industry then it detects and gives the signal to the microcontroller and according to a program it sends signal to relay driver IC to on the buzzer and also to display it on LCD thereby drawing attention of supervisor. LPG detector (MQ6) is used to detect any presence of liquid petroleum gas leakage in the industry. When leakage is detected, microcontroller performs same function as earlier and will turn on exhaust fan to forced leakage gas out to atmosphere and also automatically switch off all the lights in the industry as it may cause fire.

If the temperature of a machine or environment goes above a certain level, or if it crosses the limit, it is an

indication of a malfunction, hence temperature sensor is used. It senses when temperature of zone exceeds and will give signal to microcontroller which is an important device and will turn on cooling fans which simultaneously controls the temperature of particular zone and will be displayed by using LCD. Fire detector is used to detect burning in a particular zone. It will sense the flame and will give signal to microcontroller and according to program it will turn on the buzzer and water sprinkler simultaneously.

### 3. MICRO CONTROLLER

Micro-Controller is a small computer on a single integrated circuit. In modern technology, it is a System on a chip. A microcontroller contains one or more CPUs along with memory and programmable input-Output peripherals. There are two types of Microcontroller in use today; One is Embedded Microcontroller and Other is External Memory Microcontroller. External memory microcontroller is used when extra memory is required, therefore need can fulfilled by allowing the connection of external memory during the work as a separate ROM (RAM) which will make the work simpler and sophisticated. But in project hence memory required is within 8kb we are using embedded microcontroller.

Here we are using Atmel AT89S52 microcontroller. It is a powerful micro controller which provides a cost-effective and highly flexible solution to many embedded control applications. An embedded microcontroller is a chip which has a computer processor with all its support function, memory, and input- output interfacing built into device.

Following are some features of AT89S52 Microcontroller:

- Compatible with MCS-51 products
- 8k bytes of in-system programmable flash memory
- Fully static operation from 0 Hz to 33 MHz
- Three- level program memory lock 256 x 8-bit Internal RAM
- 4.0 to 5.5V operating range
- 32 programmable I/O lines
- 8 interrupt sources
- Three 16-bit Timer/Counters

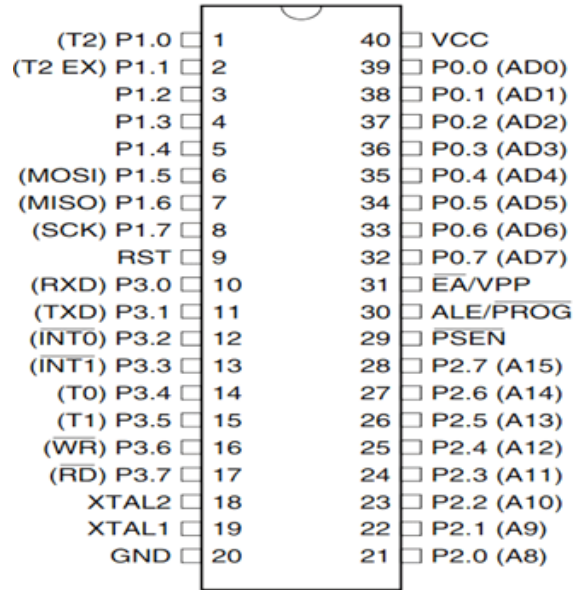


Fig:-1 Pin Diagram

### 4.METHODOLOGY

This paper has two parts:

- 1-Protection system
- 2-Load control system

In the protection system various sensors used such as smoke detector, alcohol detector sensors, temperature detector sensor, LPG gas detector sensor, fire detector sensor. In the load controlling system we use relay to on or off the load such as fan, water pump, etc. Each part of our paper has been discussed in detail.

#### A. Alcohol detector

MQ3 is an Alcohol sensor which is suitable for detecting alcohol concentration from the breath, just like a breathalyzer. It has a high sensitivity and fast response time. Sensitive materials of MQ-3gas sensor are SnO<sub>2</sub>, which with lower conductivity in clean air. This sensor can be used to detect alcohol with different concentration, it is with low cost and suitable for different application.

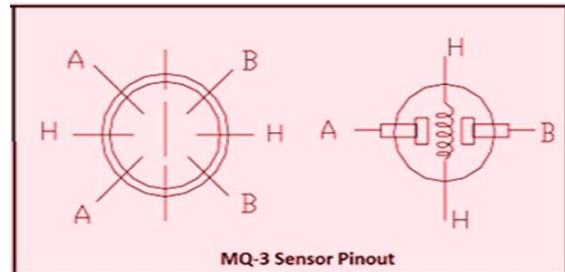


Fig: -2 MQ-3

**B. Smoke detector**

MQ-2 sensor is used for smoke detection. Main feature of this sensor is that it is not only sensitive to smoke, but also to flammable gas. The Output pin of it gives the voltage reading at output, which is proportional to the amount of smoke that the sensor is exposed to.

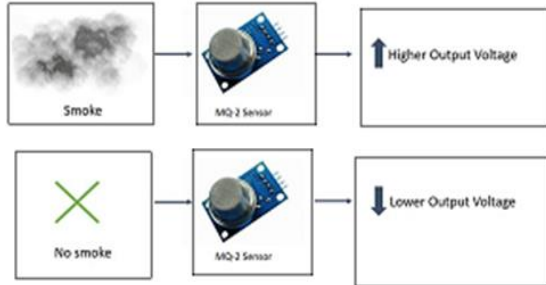


Fig:-3 MQ-2

**C. LPG Gas Detector**

MQ-6 is a Liquefied Petroleum Gas (LPG) sensor. It is suitable for sensing LPG (composed of mostly propane and butane) concentrations in the air. It can sense LPG gas concentrations anywhere from 200 to 10000ppm.

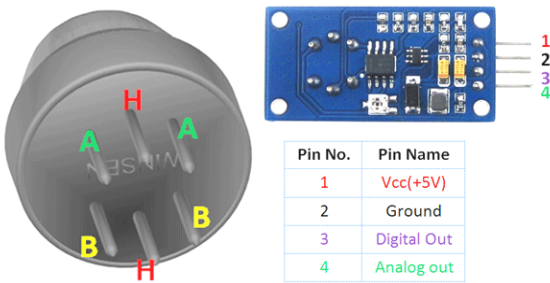


Fig: -4 MQ-6

**D. Temperature Sensing Unit**

The core functionality of the DS18B20 is its direct-to-digital temperature sensor. DS18B20 requires no external components and its power supply range is 3.0 to 5.5V. The DS18B20 communicates over a 1-Wire bus that by definition requires only one data line (and ground) for communication with a microcontroller. Terminal 1 of sensor is connected to ground, supply is given to terminal number 3, and Output terminal is 2. The resolution of the temperature sensor is 9, 10, 11, and 12 bits, corresponding to increments of 0.5°C, 0.25°C, 0.125°C, and 0.0625°C, respectively., When the particular temperature reaches the reference value then the signal is set to the input pin of the microcontroller.

**Applications of DS18B20:**

- Thermostatic controls
- Industrial systems
- Thermometers
- Thermally sensitive system

**E. Fire Detection Unit**

This detection unit has been used to detect flame in the corresponding room. Flame sensor is a Zener diode N4148. A flame detector is a sensor designed to detect and respond to the presence of a flame or fire. Responses to a detected flame depend on the installation, and includes sounding an alarm, at first, we set the detecting range of sensor using variable resistor. It works on the principles of the thermal triggering when the particular fire i.e., temperature is reached, the electrons in the junction of zener diode will start moving. i.e., will become free, the zener diode voltage will breakdown and then started conducting When fire has been detected by the sensor then the signal is given to the microcontroller. These device types have an enduring popularity in low current applications. A flame detector can often respond faster and more accurately than a smoke or heat detector.

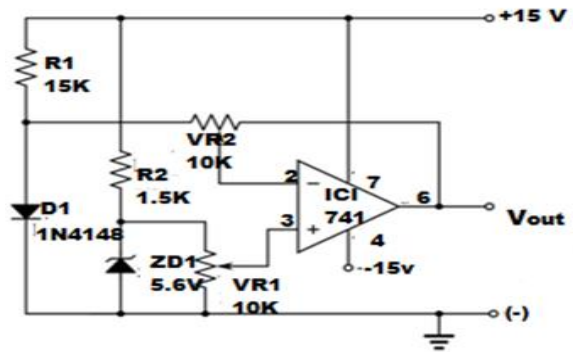


Fig-5 Circuit Diagram

**F. Load Controlling Unit**

In this paper the first and foremost priority unit is load control which has been interfaced with microcontroller. We can control each and every load individually; We can turn on or off every load by giving signal from microcontroller. The relay driver is a coil with three contacts- Normally Connected (NC), Normally Open (NO), and Common (COM). It is used to isolate both the controlling and the controlled devices. When microcontroller gives

signal to the output pin then the relay coil gets magnetized and it attracts the moving contacts. Now the moving contact leaves from its initial position (NC) normally close terminal which is a fixed terminal and establishes the connection with a new terminal which is indicated as a normally open terminal (NO).

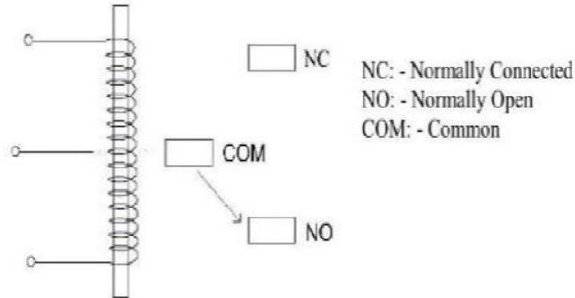


Fig: -6 Relay Coil

## 5. CONCLUSION

This paper has helped us to gain a better perspective on various aspects related to our course of study as well as practical knowledge of electronic equipment and communication.

The extensive capabilities of this system are what make it so interesting. From the convenience of a micro- controller, a user is able to control industrial accidents, human errors and for manual safety. This makes it possible for the user that there are less accidents takes place in industry and people's life or company growth is not in risk anymore. The end product will have a simplistic design making it easy for users so that they can interact. This will be essential because of the wide range of technical knowledge that industries have.

## REFERENCE

- [1] Ardam and I. Coskun, "A remote controller for home and office appliances by telephone", IEEE Transactions on Consumer Electronics, vol. 44, no. 4, pp. 1291- 1297, 1998.
- [2] T. Baudel and M. Beaudouin-Lafon, "Charade: remote control of objects using free-hand gestures", Communications of the ACM, vol. 36, no. 7, pp. 28-35, 1993.
- [3] Mustafijur Rahman, A.H.M Zadidul Karim, Sultanur Nyeem, Faisal Khan, Golam Matin, "Microcontroller Based Home Security and Load Controlling Using Gsm Technology", IJCNIS,

vol.7, no.4, pp.29-36, 2015.DOI: 10.5815/ijcnis.2015.04.04.

- [4] S.Anusha, M.Madhavi, R.Hemalatha, "Home Automation Using Atmega328 Microcontroller And Android Application", International Research Journal of Engineering and Technology (IRJET), vol.2, issue 6, E-ISSN: 2395-0056, Sep. 2015.
- [5] Fatima Tariq, Mahnoor Rashid, Muhammad N. Khan, "Implementation of Smart Homes and Industrial Automation System with Secure Communication over GSM", Universal Journal of Electrical and Electronic Engineering (UJEEE), vol.3, no.4, pp.125- 131, 2015 <http://www.hrpub.org>DOI:10.13189/ujeee.2015.030403
- [6] Aishverya Kumar Sharma, Kushagra Kumar Choubey, Mousam Sharma, "Industrial Automation Using 8051 Microcontroller", International Journal of Advanced Engineering Research and Studies, E-ISSN: 2249-8974,2015.
- [7] K. Bromley, M. Perry, and G. Webb. "Trends in Smart Home Systems, Connectivity and Services", [www.nextwave.org.uk](http://www.nextwave.org.uk), 2003.
- [8] R. Al-Ali and M. Al-Rousan, "Java-based home automation system", IEEE Transactions on Consumer Electronics, vol. 50, no. 2, pp. 498-504, 2004.