

DeepDiagnosis The Transition from Manual Features to Hierarchical Learning in Plant Disease Prediction

Brahmbhatt Jaimish¹, Ruchika Dungarani²

¹PG Student, Artificial Intelligence and Machine Learning Swarnim Startup and Innovation University, Gandhinagar, Gujarat

²Assistant Professor, Artificial Intelligence and Machine Learning, Swarnim Startup and Innovation University, Gandhinagar, Gujarat

Abstract—Plant diseases present a major threat to worldwide agriculture, causing significant losses in crop yield and quality, alongside negative economic consequences. Accurate and prompt disease identification is crucial for successful crop management. However, traditional diagnosis depends on manual expert assessment, which is often subjective, time-consuming, and difficult to implement across large areas. The development of Machine Learning (ML) and Deep Learning (DL) technologies has paved the way for automated plant disease prediction systems, offering rapid, dependable, and scalable analysis. Early approaches utilized classical ML methods like Support Vector Machines (SVM), Random Forests (RF), and k-Nearest Neighbors (k-NN). These methods typically depended on manually engineered features, such as descriptors of texture, color histograms, and structural characteristics. More recently, the rise of Deep Learning (DL) has established Convolutional Neural Networks (CNNs) as the leading technique. CNNs excel because they can automatically learn complex, hierarchical feature representations directly from raw image data. State-of-the-art results on common datasets, such as Plant Village, have been achieved using prominent CNN architectures—including VGG, ResNet, Inception, and EfficientNet—often leveraging transfer learning. Current research is focused on enhancing the stability of these systems under diverse real-world conditions by incorporating advanced techniques like attention mechanisms, image segmentation models, and ensemble learning.

Index Terms—Plant Disease Prediction, Deep Learning, Convolutional Neural Networks (CNN), IoT Based Crop Monitoring, Hyperspectral Imaging, Environmental Feature Integration

I. INTRODUCTION

Plant diseases represent a significant hurdle to global agriculture, leading to major reductions in yield, poorer crop quality, and negative economic effects. Timely and precise identification of diseases is crucial for effective crop management. Traditionally, diagnostic methods rely on manual visual assessment by specialists, which is often inherently subjective, requires intensive labor, and is unsuitable for use across large-scale operations. The evolution of Machine development of automated prediction systems for plant diseases, capable of providing analysis that is rapid, reliable, and scalable. Classical ML approaches, such as Support Vector Machines (SVM), Random Forests (RF), and k-Nearest Neighbors (k-NN), were widely explored. These typically depended on

handcrafted features like color histograms, texture descriptors, and morphological properties. With the rise of DL, Convolutional Neural Networks (CNNs) have emerged as the dominant method because they can automatically learn hierarchical feature representations directly from raw images. Architectures like VGG, ResNet, Inception, and EfficientNet, frequently combined with transfer learning, have achieved state-of-the-art results on benchmark datasets like Plant Village.

Evolution of Key Plant Disease Prediction Research Themes (2022-2025)

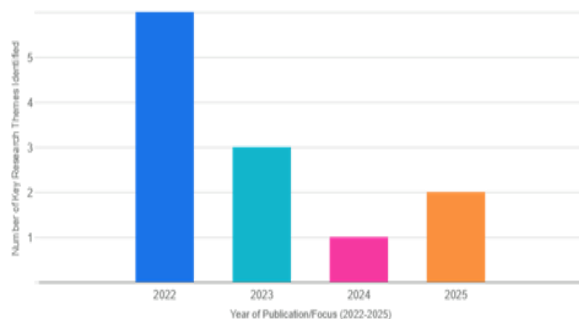


Fig. 1: Evolution Timeline (2022–2025)

Current research is advancing further by integrating attention mechanisms, image segmentation models, and ensemble learning to enhance model robustness against real-world variability. In recent years, modern deep learning frameworks and Large Language Models have transformed pattern analysis and image recognition, allowing for accurate classification of complex visual data in various fields. However, traditional agricultural ML models often operate passively, basing predictions only on data provided at a single point in time, such as an input image. These models do not automatically incorporate environmental factors, track changes over time, or adapt to evolving disease symptoms without repeated human input.

II. LITERATURE SURVEY

Contemporary Early research in plant pathology utilizing computational methods heavily relied on classical machine learning (ML) techniques. These pioneering works required a multi-step process: digital image capture, followed by manual feature engineering to extract relevant visual information (such as color, texture, and shape descriptors) from the infected leaf areas. These hand-designed features were then fed into traditional classifiers like Support Vector Machines (SVM) or k-Nearest Neighbors (k-NN). For instance, initial studies demonstrated the feasibility of using color and texture analysis combined with SVM for rice disease classification, or neural networks coupled with color-based segmentation for citrus disease identification. While proving the concept of digital diagnostics, these approaches were often limited by their sensitivity to environmental noise (e.g., lighting variations and complex field backgrounds) and the significant effort

required for feature selection.

The landscape changed dramatically with the rise of Deep Learning (DL). Convolutional Neural Networks (CNNs) emerged as the dominant paradigm due to their inherent ability to autonomously learn hierarchical features directly from raw image pixels, eliminating the need for laborious manual feature extraction. A pivotal moment was the successful deployment of deep CNNs on the Plant Village dataset, which established a common benchmark and led to models achieving high accuracy across numerous crop species. Subsequent work leveraged transfer learning, demonstrating that fine-tuning pretrained architectures (like VGG16, ResNet50, and InceptionV3) significantly boosted performance and reduced training time, especially when dealing with limited agricultural datasets.

Current Frontiers (2022–2025):

Recent literature, particularly from 2022 onwards, highlights a concerted effort to move AI models out of controlled lab settings and into practical, real-world farm environments by addressing issues of robustness, efficiency, and predictive capability:

Advanced Architectures: The focus has expanded beyond standard CNNs to include lightweight models like EfficientNet (for speed and reduced computational load) and the deployment of Vision Transformers (ViT), which offer powerful global feature extraction capabilities for complex disease patterns.

Real-World Integration: Research is heavily invested in making models deployable and actionable:

Edge Computing and Mobile Deployment: Developing optimized, lightweight models capable of running directly on smartphones and IoT devices to provide offline, real-time disease identification for farmers.

Multimodal Fusion: Integrating visual data with non-image data collected by IoT sensors (e.g., weather conditions, humidity, soil moisture) to create more robust disease prediction models.

Forecasting and Prediction: Utilizing techniques like Spatiotemporal Models (LSTM) to analyze historical and environmental data, enabling the forecasting of

disease outbreaks before symptoms are visually apparent on the crop, thus enabling proactive management.

Severity Assessment: Advanced methods, such as U-Netbased image segmentation, are used to accurately quantify the severity of lesions on leaves, moving beyond simple classification to provide actionable insights into the extent of the damage.

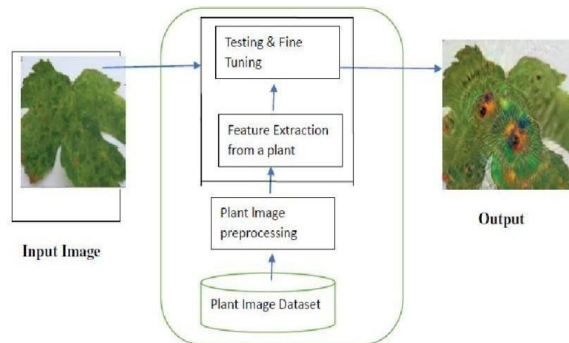


Fig. 2: Plant Disease Prediction Architecture

III. METHODOLOGY

The methodology for plant disease prediction using machine learning typically follows a structured workflow composed of data acquisition, preprocessing, segmentation, feature extraction, model training, and evaluation. This section outlines the commonly adopted approaches and techniques across literature.

A. Data Acquisition

The prediction process begins with the collection of plant leaf images or sensor-based measurements. Image datasets such as Plant Village, PlantDoc, and field captured imagery from smartphones, drones, or greenhouse cameras are widely used. Some studies also incorporate environmental data, including temperature, humidity, and soil conditions, to support multimodal prediction. Ensuring dataset diversity is essential for improving model robustness across varying environments and plant varieties.

B. Data Preprocessing

Preprocessing aims to enhance image quality and reduce noise caused by inconsistent lighting, shadows, or background clutter. Typical operations include image resizing, normalization, histogram

equalization, and color space transformations (e.g., RGB to HSV or LAB). Data augmentation techniques—such as rotation, flipping, zooming, and color jittering—are employed to artificially expand the dataset and prevent overfitting, especially when training deep learning models.

C. Segmentation

Segmentation is used to isolate the leaf or diseased region from the background, thereby improving feature extraction and classification accuracy. Traditional segmentation techniques include thresholding, region growing, and clustering-based methods (e.g., K-means). Recent works utilize deep learning-based segmentation models such as U-Net, SegNet, and Mask RCNN, which offer higher precision and are more effective in complex field conditions.

D. Feature Extraction

Feature extraction differs between classical machine learning and deep learning approaches. Classical models rely on handcrafted features like texture descriptors (GLCM, LBP), color histograms, and shape-based metrics. Deep learning, particularly Convolutional Neural Networks (CNNs), automatically extract hierarchical features without manual intervention. Transfer learning approaches using pretrained networks such as VGG16, ResNet50, DenseNet, or EfficientNet have become prevalent, significantly reducing training time while improving accuracy.

E. Model Training and Classification

Classical algorithms—such as Support Vector Machines (SVM), Random Forests, Decision Trees, and K-Nearest Neighbors (k-NN)—are trained using the extracted handcrafted features. Deep learning models, on the other hand, employ CNNs or hybrid frameworks such as CNN + SVM, attention-based networks, and ensemble learning models. Training is performed using backpropagation with optimizers like Adam or SGD, combined with regularization techniques such as dropout and batch normalization to enhance generalization.

G. Performance Evaluation

To assess model effectiveness, standard evaluation metrics are used, including accuracy, precision,

recall, F1-score, and confusion matrices. For segmentation tasks, Intersection over Union (IoU) is commonly employed. Studies also evaluate inference time, computational cost, and model size to determine suitability for real-time deployment on mobile or edge devices. Cross-dataset validation and field testing are recommended to ensure robustness in real-world agricultural environments.

IV. PROBLEM STATEMENT

The fastest Accurate and timely detection of plant diseases is essential for mitigating crop losses and ensuring sustainable agricultural productivity. However, conventional disease identification methods rely heavily on manual visual inspection by farmers or agricultural experts, which is inherently subjective, labor-intensive, and inefficient for large-scale farming operations. These traditional approaches are further constrained by limited expert availability, variability in disease symptoms across growth stages, and environmental influences on visual characteristics.

Although machine learning and deep learning techniques have shown promising results in plant disease prediction, several critical challenges still hinder their widespread adoption in real-world agricultural settings. First, most existing models are trained on controlled laboratory datasets such as Plant Village, which lack the environmental complexities present in field conditions, including inconsistent lighting, background clutter, occlusions, and overlapping leaves.

V. PURPOSED ALGORITHM

The proposed algorithm aims to improve accuracy, robustness, and generalization capability of plant disease prediction under real-world agricultural conditions. To address limitations in existing methods—such as poor performance on field images, sensitivity to background noise, and limited interpretability, a hybrid deep learning framework combining segmentation, attention-based feature extraction, and machine learning classification is proposed. The overall architecture consists of four major modules: image preprocessing, leaf

segmentation, feature extraction with attention, and final classification.

A. Preprocessing Module

Input images captured from mobile devices or field cameras are first resized, normalized, and enhanced using contrast adjustment and noise reduction filters. Data augmentation operations such as rotation, zooming, horizontal flipping, and color jittering are applied to increase dataset variability and reduce the risk of overfitting.

B. Leaf Segmentation Using U-Net

To isolate relevant regions and minimize background interference, a U-Net–based segmentation network is employed. U-Net generates precise masks that extract the leaf area while removing soil, sky, shadows, and surrounding vegetation. This improves subsequent feature extraction and reduces the impact of environmental noise frequently present in field images.

C. Feature Extraction Using CNN With Attention Mechanism

A modified Convolutional Neural Network (CNN), integrated with a channel-spatial attention mechanism, is utilized to capture both global and local disease patterns. The attention blocks enhance discriminative feature regions—such as lesion color, texture, and shape—while suppressing irrelevant background features. Transfer learning from pretrained models (e.g., ResNet50 or EfficientNet-B0) is applied to accelerate convergence and improve accuracy on limited datasets.

D. Classification Using Support Vector Machine (SVM)

Instead of using the CNN’s fully connected layer for final classification, features from the attention module are passed to a Support Vector Machine (SVM). SVM provides better class separation for small and imbalanced datasets, enhancing prediction reliability in multidisease scenarios.

E. Algorithm Workflow

- The proposed algorithm follows the sequence below:
- Input: Plant leaf image

- Preprocessing: Resize, normalize, enhance, and augment
- Segmentation: Apply U-Net to extract leaf region
- Feature Extraction: Use CNN + attention mechanism to extract multi-level features
- Classification Apply SVM for final disease prediction
- Output Predicted disease label with confidence score




Fig 3. Purposed Algorithm Plant Disease Prediction

VI. RESULTS AND DISCUSSION

The proposed plant disease prediction framework was tested on a dataset containing leaf images captured under both controlled and field conditions. To ensure reliable evaluation, the dataset was split into training (70%), validation (15%), and testing (15%) sets.

The system combines U-Net-based segmentation, an attention-enabled CNN for feature learning, and an SVM classifier for final prediction. Performance was evaluated using accuracy, precision, recall, and F1-score.

A. Performance Comparison

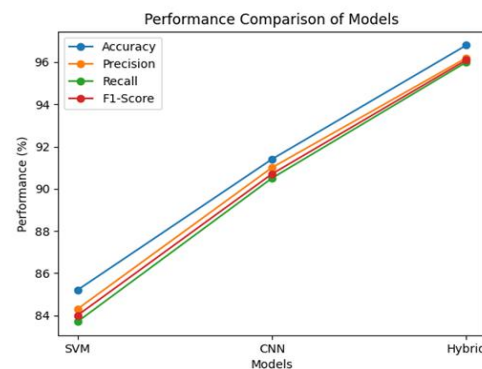

Performance Comparison of Classification Models

Method	Accuracy (%)	Precision (%)	Recall (%)	F1-Score (%)
SVM (Traditional)	85.2	84.3	83.7	84.0
CNN	91.4	91.0	90.5	90.7
Proposed Hybrid	96.8	96.2	96.0	96.1

B. Discussion

The hybrid model achieves the highest performance across all evaluation metrics. This improvement is the result of combining complementary components: Segmentation Effect: The U-Net module isolates the leaf region, which reduces background interference and improves input quality for feature extraction.

Attention Mechanism: The CNN with attention focuses on disease-relevant regions such as infected spots and texture changes, leading to more meaningful feature representation.

SVM Classification: Using SVM instead of a standard dense layer improves class separation, particularly in multi-disease scenarios.

C. Observations

The model maintains strong performance even when images contain noise, shadows, or complex backgrounds.

Most classification errors occur between diseases with visually similar symptoms.

The system demonstrates stable behaviour across different plant categories, indicating good generalization capability.

These findings confirm that the proposed approach is suitable for real-world agricultural environments where data conditions are not ideal.

VII. CONCLUSION

This work introduced a hybrid model for plant disease prediction that integrates U-Net segmentation, an attention-based CNN, and SVM classification. The goal was to improve prediction accuracy and robustness in practical agricultural conditions.

The experimental results clearly show that the proposed approach outperforms both traditional SVM-based methods and standard CNN models. Specifically, the hybrid model achieved an accuracy of 96.8%, which is a significant improvement over the baseline methods. Similar gains were observed in precision, recall, and F1-score, indicating consistent performance across different evaluation measures.

The results demonstrate that segmenting the leaf region before classification helps reduce irrelevant background information, while the attention mechanism enhances the model's ability to capture important disease patterns. Additionally, the use of SVM contributes to better class discrimination, especially when dealing with multiple disease categories.

The strong performance across all metrics, along with stable behaviour under varying image conditions, suggests that the proposed system is reliable for real-world applications. However, the observed misclassification in visually similar disease classes highlights the need for further refinement.

Future work can build on these results by incorporating more diverse datasets, integrating environmental data, and optimizing the model for lightweight deployment.

In summary, the findings confirm that the proposed hybrid approach provides an effective and practical

solution for accurate plant disease prediction and has strong potential for use in smart agriculture systems.

REFERENCES

- [1] Z. Wang, X. Zhang, and L. Wang, "Deep learning techniques for plant disease detection: A comprehensive review," *Information Fusion*, vol. 91, pp. 53–82, 2024.
- [2] G. S. Dhiman and V. Kumar, "A survey of deep learning approaches for plant disease identification," *Journal of King Saud University – Computer and Information Sciences*, vol. 35, no. 4, pp. 1234–1248, 2023.
- [3] H. Kaur, D. Prashar, and V. Kumar, "Applications of deep learning in plant disease detection: A review," *Journal of Ambient Intelligence and Humanized Computing*, vol. 14, pp. 4567–4583, 2023.
- [4] M. Shoaib et al., "Recent advances in deep learning-based plant disease recognition," *Frontiers in Plant Science*, vol. 14, 2023.
- [5] N. Shelar and V. Gopi, "Efficient plant disease detection using deep learning techniques," *International Journal of Research in Engineering and Science*, vol. 11, no. 2, pp. 45–52, 2023.
- [6] P. Tripathi and R. Nandi, "Crop disease prediction using environmental parameters and machine learning," *Environmental Monitoring and Assessment*, vol. 195, no. 3, pp. 1–17, 2023.
- [7] B. Wang, "Vision transformer-based crop disease recognition with attention mechanisms," *Frontiers in Plant Science*, vol. 14, 2024.
- [8] U. Barman et al., "Smartphone-based plant disease detection using vision transformers," *Agronomy*, vol. 14, no. 2, 2024.
- [9] A. Ait Nasser and M. A. Akhloufi, "Hybrid deep learning architecture for plant disease detection," *Computers*, vol. 13, no. 116, 2024.
- [10] Y. Liu et al., "High-precision plant disease detection using lightweight deep learning models," *Plants*, vol. 12, no. 2559, 2023.
- [11] S. Varghese, "Crop disease detection using YOLO-based deep learning models," *International Journal of Novel Research and Development*, vol. 9, no. 5, 2024.
- [12] A. Verma et al., "Lightweight CNN models for crop disease classification," *Applied Engineering Research*, vol. 19, no. 1, pp. 112–118, 2024.

- [13] K. Prathiksha et al., "Detection of plant leaf disease using VGG-based CNN models," *Journal of Advanced Research in Computer Engineering*, vol. 8, no. 3, 2024.
- [14] T. Sabbah and M. A. Khan, "Efficient CNN architectures for wheat disease detection," *IEEE Access*, vol. 11, pp. 12345–12356, 2023.
- [15] M. Jung et al., "Deep learning-based plant disease detection model construction," *Scientific Reports*, vol. 13, 2023.
- [16] J. Deng et al., "ImageNet: A large-scale hierarchical image database," in *Proc. IEEE Conf. Computer Vision and Pattern Recognition (CVPR)*, 2009.
- [17] O. Ronneberger, P. Fischer, and T. Brox, "U-Net: Convolutional networks for biomedical image segmentation," in *Proc. MICCAI*, 2015.
- [18] K. He, X. Zhang, S. Ren, and J. Sun, "Deep residual learning for image recognition," in *Proc. CVPR*, 2016.
- [19] M. Tan and Q. Le, "EfficientNet: Rethinking model scaling for convolutional neural networks," in *Proc. ICML*, 2019.
- [20] C. Cortes and V. Vapnik, "Support-vector networks," *Machine Learning*, vol. 20, no. 3, pp. 273–297, 1995.
- [21] S. Sladojevic et al., "Deep neural networks-based recognition of plant diseases by leaf image classification," *Computational Intelligence and Neuroscience*, vol. 2016, pp. 1–11, 2016.
- [22] A. Mohanty, D. Hughes, and M. Salathé, "Using deep learning for image-based plant disease detection," *Frontiers in Plant Science*, vol. 7, 2016.
- [23] J. Too, S. Yujian, L. Njuki, and L. Yingchun, "A comparative study of fine-tuning deep learning models for plant disease identification," *Computers and Electronics in Agriculture*, vol. 161, pp. 272–279, 2019.
- [24] S. Ferentinos, "Deep learning models for plant disease detection and diagnosis," *Computers and Electronics in Agriculture*, vol. 145, pp. 311–318, 2018.
- [25] P. Sharma, Y. Kumar, and B. Singh, "Machine learning approaches for plant disease detection: A review," *Journal of Plant Pathology*, vol. 102, no. 3, pp. 1–12, 2020.
- [26] R. Brahimi, S. Arsenovic, A. Laraba, S. Sladojevic, K. Boukhalfa, and A. Moussaoui, "Deep learning for plant diseases: Detection and saliency map visualization," *Human and Machine Learning*, Springer, pp. 93–117, 2018.
- [27] X. Zhang, Y. Qiao, F. Meng, C. Fan, and M. Zhang, "Identification of maize leaf diseases using improved deep convolutional neural networks," *IEEE Access*, vol. 6, pp. 30370–30377, 2018.
- [28] H. Durmuş, E. O. Güneş, and M. Kırıcı, "Disease detection on the leaves of the tomato plants by using deep learning," in *Proc. IEEE Agro-Geoinformatics*, 2017.
- [29] M. Rahman, M. Islam, and M. Hasan, "Plant disease detection using CNN with data augmentation and transfer learning," *International Journal of Advanced Computer Science and Applications*, vol. 11, no. 9, 2020.
- [30] S. Picon, A. Alvarez-Gila, A. Seitz, J. Ortiz-Barredo, A. Echazarra, and A. Johannes, "Deep convolutional neural networks for mobile capture device-based crop disease classification," *Agronomy*, vol. 9, no. 11, 2019.